

VGZ EVO



FULLY THREADED SCREW WITH CYLINDRICAL HEAD

C4 EVO COATING

Multilayer coating with a surface treatment of epoxy resin and aluminium flakes. No rust after 1440 hours of salt spray exposure test, as per ISO 9227. Can be used in service class 3 outdoor applications and under class C4 atmospheric corrosion conditions.

AUTOCLAVE-TREATED TIMBER

The C4 EVO coating has been certified according to US acceptance criterion AC257 for outdoor use with ACQ-treated timber.

STRUCTURAL APPLICATIONS


Deep thread and high resistance steel ($f_{y,k} = 1000 \text{ N/mm}^2$) for excellent tensile performance. Approved for structural applications subject to stresses in any direction vs the grain ($0^\circ - 90^\circ$). Reduced minimum distances.

CYLINDRICAL HEAD

It allows the screw to penetrate and pass through the surface of the wood substrate. Ideal for concealed joints, timber couplings and structural reinforcements. It is the right choice for increased fire performance.



| | |
|-------------------------|---|
| DIAMETER [mm] | 5 <input type="text" value="5"/> <input type="text" value="11"/> 11 |
| LENGTH [mm] | 80 <input type="text" value="80"/> <input type="text" value="600"/> 1000 |
| SERVICE CLASS | <input checked="" type="radio"/> SC1 <input checked="" type="radio"/> SC2 <input checked="" type="radio"/> SC3 |
| ATMOSPHERIC CORROSIVITY | <input checked="" type="radio"/> C1 <input checked="" type="radio"/> C2 <input checked="" type="radio"/> C3 <input checked="" type="radio"/> C4 |
| WOOD CORROSIVITY | <input checked="" type="radio"/> T1 <input checked="" type="radio"/> T2 <input checked="" type="radio"/> T3 |
| MATERIAL | C4 EVO COATING carbon steel with C4 EVO coating |

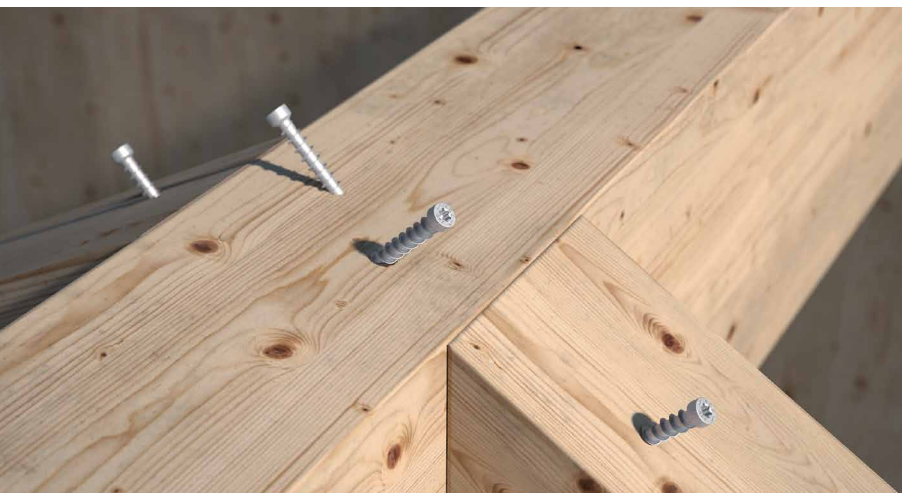

FIELDS OF USE

- timber based panels
- solid timber and glulam
- CLT and LVL
- high density woods
- ACQ, CCA treated timber



TRUSS & RAFTER JOINTS


Ideal for joining small timber elements such as the crossbeams and uprights of light frame structures. Certified for application parallel to the grain and with reduced minimum distances.

TIMBER STUDS

Values also tested, certified and calculated for CLT and high density woods such as Microllam® LVL. Ideal for fastening I-Joist beams.




Fastening Wood Trusses outdoors.

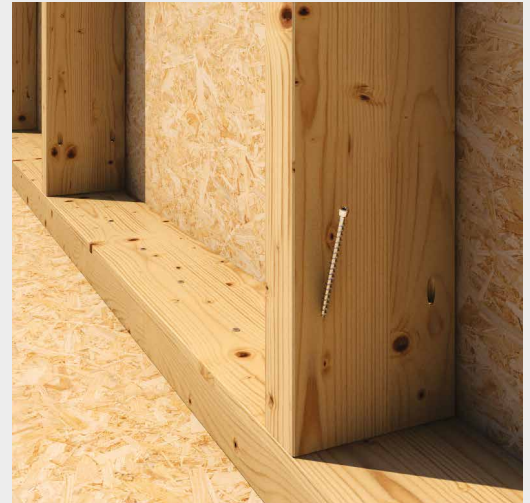

Fastening the uprights of light frame structures with VGZ EVO Ø5 mm.

GEOMETRY AND MECHANICAL CHARACTERISTICS

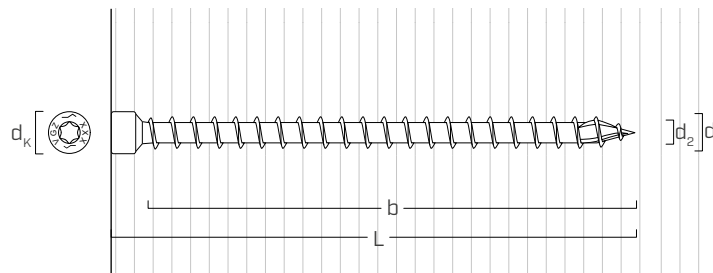

GEOMETRY

| Nominal diameter | d_1 | [mm] | 5,3 | 5,6 | 7 | 9 | 11 |
|---|-----------|------|------|------|------|-------|-------|
| Head diameter | d_k | [mm] | 8,00 | 8,00 | 9,50 | 11,50 | 13,50 |
| Thread diameter | d_2 | [mm] | 3,60 | 3,80 | 4,60 | 5,90 | 6,60 |
| Pre-drilling hole diameter ⁽¹⁾ | $d_{v,S}$ | [mm] | 3,5 | 3,5 | 4,0 | 5,0 | 6,0 |
| Pre-drilling hole diameter ⁽²⁾ | $d_{v,H}$ | [mm] | 4,0 | 4,0 | 5,0 | 6,0 | 7,0 |

⁽¹⁾ Pre-drilling valid for softwood.

⁽²⁾ Pre-drilling valid for hardwood and beech LVL.

CHARACTERISTIC MECHANICAL PARAMETERS

| Nominal diameter | d_1 | [mm] | 5,3 | 5,6 | 7 | 9 | 11 |
|------------------|--------------|----------------------|------|------|------|------|------|
| Tensile strength | $f_{tens,k}$ | [kN] | 11,0 | 12,3 | 15,4 | 25,4 | 38,0 |
| Yield strength | $f_{y,k}$ | [N/mm ²] | 1000 | 1000 | 1000 | 1000 | 1000 |
| Yield moment | $M_{y,k}$ | [Nm] | 9,2 | 10,6 | 14,2 | 27,2 | 45,9 |

| | | | softwood (softwood) | LVL softwood (LVL softwood) | pre-drilled beech LVL (beech LVL predrilled) |
|---------------------------------|------------|----------------------|------------------------|--------------------------------|---|
| Withdrawal resistance parameter | $f_{ax,k}$ | [N/mm ²] | 11,7 | 15,0 | 29,0 |
| Associated density | ρ_a | [kg/m ³] | 350 | 500 | 730 |
| Calculation density | ρ_k | [kg/m ³] | ≤ 440 | 410 ÷ 550 | 590 ÷ 750 |


For applications with different materials please see ETA-11/0030.

CODES AND DIMENSIONS

| d ₁ [mm] | CODE | L [mm] | b [mm] | pcs |
|------------------------|------------|------------|-----------|-----|
| 5,3 TX 25 | VGZEVO580 | 80 | 70 | 50 |
| | VGZEVO5100 | 100 | 90 | 50 |
| | VGZEVO5120 | 120 | 110 | 50 |
| 5,6 TX 25 | VGZEVO5140 | 140 | 130 | 50 |
| | VGZEVO5150 | 150 | 140 | 50 |
| | VGZEVO5160 | 160 | 150 | 50 |
| 7 TX 30 | VGZEVO780 | 80 | 70 | 25 |
| | VGZEVO7100 | 100 | 90 | 25 |
| | VGZEVO7120 | 120 | 110 | 25 |
| | VGZEVO7140 | 140 | 130 | 25 |
| | VGZEVO7160 | 160 | 150 | 25 |
| | VGZEVO7180 | 180 | 170 | 25 |
| | VGZEVO7200 | 200 | 190 | 25 |
| | VGZEVO7220 | 220 | 210 | 25 |
| | VGZEVO7240 | 240 | 230 | 25 |
| | VGZEVO7260 | 260 | 250 | 25 |
| | VGZEVO7280 | 280 | 270 | 25 |
| | VGZEVO7300 | 300 | 290 | 25 |
| | VGZEVO7340 | 340 | 330 | 25 |
| | VGZEVO7380 | 380 | 370 | 25 |
| | 9 TX 40 | VGZEVO9160 | 160 | 150 |
| VGZEVO9180 | | 180 | 170 | 25 |
| VGZEVO9200 | | 200 | 190 | 25 |
| VGZEVO9220 | | 220 | 210 | 25 |
| VGZEVO9240 | | 240 | 230 | 25 |
| VGZEVO9260 | | 260 | 250 | 25 |
| VGZEVO9280 | | 280 | 270 | 25 |
| VGZEVO9300 | | 300 | 290 | 25 |
| VGZEVO9320 | | 320 | 310 | 25 |
| VGZEVO9340 | | 340 | 330 | 25 |
| VGZEVO9360 | 360 | 350 | 25 | |
| VGZEVO9380 | 380 | 370 | 25 | |
| VGZEVO9400 | 400 | 390 | 25 | |
| VGZEVO9440 | 440 | 430 | 25 | |
| VGZEVO9480 | 480 | 470 | 25 | |
| VGZEVO9520 | 520 | 510 | 25 | |


| d ₁ [mm] | CODE | L [mm] | b [mm] | pcs |
|------------------------|-------------|-----------|-----------|-----|
| 11 TX 50 | VGZEVO11250 | 250 | 240 | 25 |
| | VGZEVO11300 | 300 | 290 | 25 |
| | VGZEVO11350 | 350 | 340 | 25 |
| 11 TX 50 | VGZEVO11400 | 400 | 390 | 25 |
| | VGZEVO11450 | 450 | 440 | 25 |
| | VGZEVO11500 | 500 | 490 | 25 |
| | VGZEVO11550 | 550 | 540 | 25 |
| 11 TX 50 | VGZEVO11600 | 600 | 590 | 25 |

RELATED PRODUCTS



JIG VGZ 45°
TEMPLATE FOR 45° SCREWS

page 409

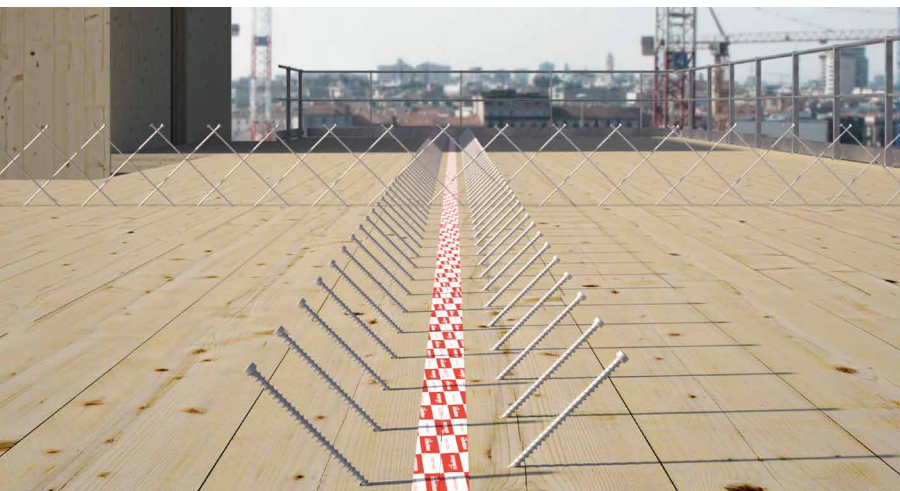

OUTDOOR STRUCTURAL PERFORMANCE


Values also tested, certified and calculated for CLT and high density woods such as Microllam® LVL. Ideal for fastening timber-framed panels and lattice beams (Rafter, Truss).

MINIMUM DISTANCES FOR AXIAL STRESSES


😊 screws inserted **WITH** and **WITHOUT** pre-drilled hole

| d_1 | [mm] | | 5,3 | 5,6 | 7 | 9 | 11 |
|-------------|------|-------|-----|-----|----|----|----|
| a_1 | [mm] | 5·d | 27 | 28 | 35 | 45 | 55 |
| a_2 | [mm] | 5·d | 27 | 28 | 35 | 45 | 55 |
| $a_{2,LIM}$ | [mm] | 2,5·d | 13 | 14 | 18 | 23 | 28 |
| $a_{1,CG}$ | [mm] | 8·d | 42 | 45 | 56 | 72 | 88 |
| $a_{2,CG}$ | [mm] | 3·d | 16 | 17 | 21 | 27 | 33 |
| a_{CROSS} | [mm] | 1,5·d | 8 | 8 | 11 | 14 | 17 |


SCREWS UNDER TENSION INSERTED WITH AN ANGLE α WITH RESPECT TO THE GRAIN

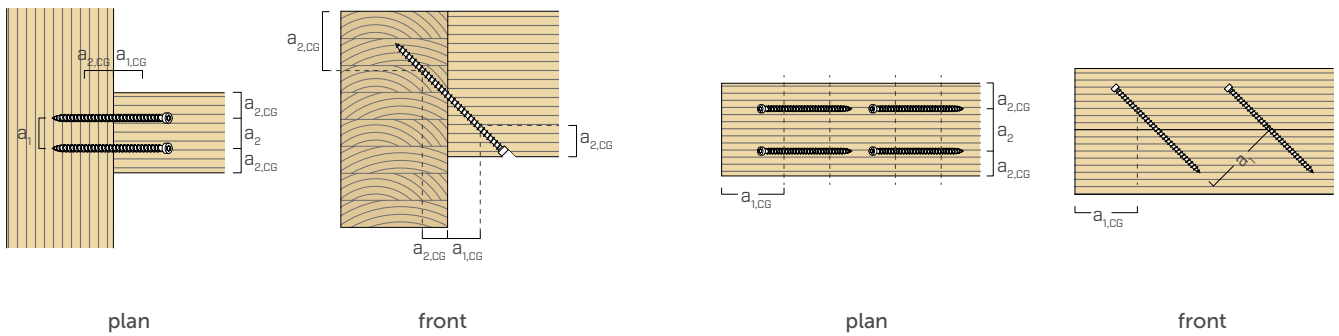

SCREWS INSERTED WITH $\alpha = 90^\circ$ ANGLE WITH RESPECT TO THE GRAIN

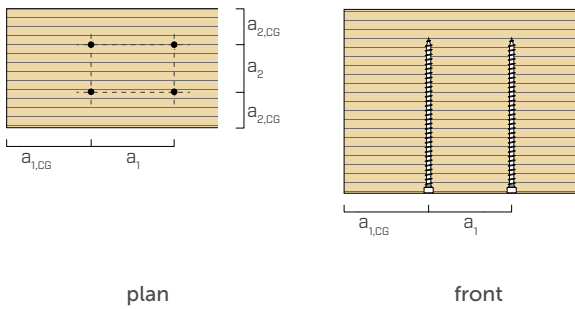


CROSSED SCREWS INSERTED WITH AN ANGLE α WITH RESPECT TO THE GRAIN

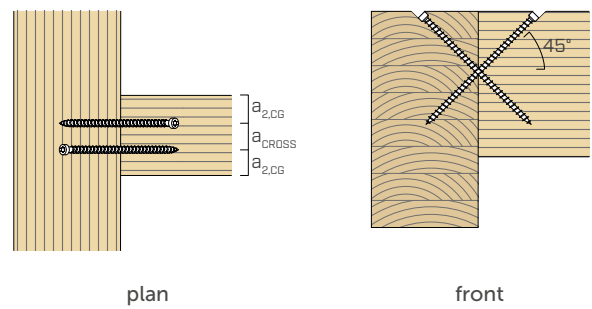

NOTES

- Minimum distances according to ETA-11/0030.
- The minimum distances are independent of the insertion angle of the connector and the angle of the force with respect to the grain.
- The axial distance a_2 can be reduced down to $a_{2,LIM}$ if for each connector a "joint surface" $a_1 a_2 = 25 d_1^2$ is maintained.
- For main beam-secondary beam joints with VGZ screws $d = 7$ mm inclined or crossed, inserted at an angle of 45° to the secondary beam head, with a minimum secondary beam height of $18 d$, the minimum distance $a_{1,CG}$ can be taken equal to $8 \cdot d_1$ and the minimum distance $a_{2,CG}$ equal to $3 \cdot d_1$.
- For 3 THORNS tip the minimum distances in the table are derived from experimental tests; alternatively, adopt $a_{1,CG} = 10 \cdot d$ and $a_{2,CG} = 4 \cdot d$ in accordance with EN 1995:2014.

EFFECTIVE THREAD USED IN CALCULATION

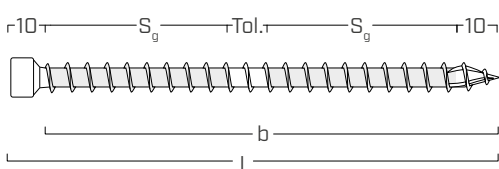

$$b = S_{g,tot} = L - 10 \text{ mm}$$

represents the entire length of the threaded part

$$S_g = (L - 10 \text{ mm} - 10 \text{ mm} - \text{Tol.}) / 2$$

represents the partial length of the threaded part net of a laying tolerance (Tol.) of 10 mm

TENSION / COMPRESSION

| geometry | | TENSION / COMPRESSION | | | | | | | | steel tension | instability $\epsilon=90^\circ$ |
|----------------|------|-------------------------|------------------|----------------------|---------------------|---------------------------|------------------|----------------------|---------------------|---------------------|------------------------------------|
| | | total thread withdrawal | | | | partial thread withdrawal | | | | | |
| | | $\epsilon=90^\circ$ | | $\epsilon=0^\circ$ | | $\epsilon=90^\circ$ | | $\epsilon=0^\circ$ | | | |
| | | | | | | | | | | | |
| d ₁ | L | S _{g,tot} | A _{min} | R _{ax,90,k} | R _{ax,0,k} | S _g | A _{min} | R _{ax,90,k} | R _{ax,0,k} | R _{tens,k} | R _{ki,90,k} |
| | [mm] | [mm] | [mm] | [kN] | [kN] | [mm] | [mm] | [kN] | [kN] | [kN] | [kN] |
| 5,3 | 80 | 70 | 90 | 4,68 | 1,41 | 25 | 45 | 1,67 | 0,50 | 11,00 | 6,20 |
| | 100 | 90 | 110 | 6,02 | 1,81 | 35 | 55 | 2,34 | 0,70 | | |
| | 120 | 110 | 130 | 7,36 | 2,21 | 45 | 65 | 3,01 | 0,90 | | |
| 5,6 | 140 | 130 | 150 | 9,19 | 2,76 | 55 | 75 | 3,89 | 1,17 | 12,30 | 6,93 |
| | 150 | 150 | 170 | 10,61 | 2,97 | 65 | 85 | 4,60 | 1,27 | | |
| | 160 | 150 | 170 | 10,61 | 3,18 | 65 | 85 | 4,60 | 1,38 | | |
| 7 | 80 | 70 | 90 | 6,19 | 1,86 | 25 | 45 | 2,21 | 0,66 | 15,40 | 10,30 |
| | 100 | 90 | 110 | 7,96 | 2,39 | 35 | 55 | 3,09 | 0,93 | | |
| | 120 | 110 | 130 | 9,72 | 2,92 | 45 | 65 | 3,98 | 1,19 | | |
| | 140 | 130 | 150 | 11,49 | 3,45 | 55 | 75 | 4,86 | 1,46 | | |
| | 160 | 150 | 170 | 13,26 | 3,98 | 65 | 85 | 5,75 | 1,72 | | |
| | 180 | 170 | 190 | 15,03 | 4,51 | 75 | 95 | 6,63 | 1,99 | | |
| | 200 | 190 | 210 | 16,79 | 5,04 | 85 | 105 | 7,51 | 2,25 | | |
| | 220 | 210 | 230 | 18,56 | 5,57 | 95 | 115 | 8,40 | 2,52 | | |
| | 240 | 230 | 250 | 20,33 | 6,10 | 105 | 125 | 9,28 | 2,78 | | |
| | 260 | 250 | 270 | 22,10 | 6,63 | 115 | 135 | 10,16 | 3,05 | | |
| | 280 | 270 | 290 | 23,87 | 7,16 | 125 | 145 | 11,05 | 3,31 | | |
| 300 | 290 | 310 | 25,63 | 7,69 | 135 | 155 | 11,93 | 3,58 | | | |
| 340 | 330 | 350 | 29,17 | 8,75 | 155 | 175 | 13,70 | 4,11 | | | |
| 380 | 370 | 390 | 32,70 | 9,81 | 175 | 195 | 15,47 | 4,64 | | | |
| 9 | 160 | 150 | 170 | 17,05 | 5,11 | 65 | 85 | 7,39 | 2,22 | 25,40 | 17,25 |
| | 180 | 170 | 190 | 19,32 | 5,80 | 75 | 95 | 8,52 | 2,56 | | |
| | 200 | 190 | 210 | 21,59 | 6,48 | 85 | 105 | 9,66 | 2,90 | | |
| | 220 | 210 | 230 | 23,87 | 7,16 | 95 | 115 | 10,80 | 3,24 | | |
| | 240 | 230 | 250 | 26,14 | 7,84 | 105 | 125 | 11,93 | 3,58 | | |
| | 260 | 250 | 270 | 28,41 | 8,52 | 115 | 135 | 13,07 | 3,92 | | |
| | 280 | 270 | 290 | 30,68 | 9,21 | 125 | 145 | 14,21 | 4,26 | | |
| | 300 | 290 | 310 | 32,96 | 9,89 | 135 | 155 | 15,34 | 4,60 | | |
| | 320 | 310 | 330 | 35,23 | 10,57 | 145 | 165 | 16,48 | 4,94 | | |
| | 340 | 330 | 350 | 37,50 | 11,25 | 155 | 175 | 17,61 | 5,28 | | |
| | 360 | 350 | 370 | 39,78 | 11,93 | 165 | 185 | 18,75 | 5,63 | | |
| | 380 | 370 | 390 | 42,05 | 12,61 | 175 | 195 | 19,89 | 5,97 | | |
| | 400 | 390 | 410 | 44,32 | 13,30 | 185 | 205 | 21,02 | 6,31 | | |
| | 440 | 430 | 450 | 48,87 | 14,66 | 205 | 225 | 23,30 | 6,99 | | |
| 480 | 470 | 490 | 53,41 | 16,02 | 225 | 245 | 25,57 | 7,67 | | | |
| 520 | 510 | 530 | 57,96 | 17,39 | 245 | 265 | 27,84 | 8,35 | | | |
| 11 | 250 | 240 | 260 | 33,34 | 10,00 | 110 | 130 | 15,28 | 4,58 | 38,00 | 21,93 |
| | 300 | 290 | 310 | 40,28 | 12,08 | 135 | 155 | 18,75 | 5,63 | | |
| | 350 | 340 | 360 | 47,22 | 14,17 | 160 | 180 | 22,22 | 6,67 | | |
| | 400 | 390 | 410 | 54,17 | 16,25 | 185 | 205 | 25,70 | 7,71 | | |
| | 450 | 440 | 460 | 61,11 | 18,33 | 210 | 230 | 29,17 | 8,75 | | |
| | 500 | 490 | 510 | 68,06 | 20,42 | 235 | 255 | 32,64 | 9,79 | | |
| | 550 | 540 | 560 | 75,00 | 22,50 | 260 | 280 | 36,11 | 10,83 | | |
| | 600 | 590 | 610 | 81,95 | 24,58 | 285 | 305 | 39,59 | 11,88 | | |

ϵ = screw-to-grain angle

NOTES and GENERAL PRINCIPLES on page 151.


| geometry | | SLIDING | | | | | SHEAR | | | |
|---------------|-----------|------------------|-----------|-------------------|-------------------|-------------------------|---|--|----------------------|---------------------|
| | | timber-to-timber | | | steel tension | timber-to-timber | timber-to-timber $\epsilon=90^\circ$ | timber-to-timber $\epsilon=0^\circ$ | | |
| | | | | | | | | | | |
| d_1 [mm] | L [mm] | S_g [mm] | A [mm] | B_{min} [mm] | $R_{V,k}$ [kN] | $R_{tens,45,k}$ [kN] | A [mm] | S_g [mm] | $R_{V,90,k}$ [kN] | $R_{V,0,k}$ [kN] |
| 5,3 | 80 | 25 | 35 | 50 | 1,18 | 7,78 | 40 | 25 | 1,99 | 1,03 |
| | 100 | 35 | 40 | 55 | 1,66 | | 50 | 35 | 2,16 | 1,19 |
| | 120 | 45 | 45 | 60 | 2,13 | | 60 | 45 | 2,32 | 1,37 |
| 5,6 | 140 | 55 | 55 | 70 | 2,75 | 8,70 | 70 | 55 | 2,69 | 1,59 |
| | 150 | 65 | 60 | 75 | 3,25 | | 80 | 65 | 2,87 | 1,62 |
| | 160 | 65 | 60 | 75 | 3,25 | | 80 | 65 | 2,87 | 1,64 |
| 7 | 80 | 25 | 35 | 50 | 1,56 | 10,89 | 40 | 25 | 2,59 | 1,34 |
| | 100 | 35 | 40 | 55 | 2,19 | | 50 | 35 | 2,93 | 1,53 |
| | 120 | 45 | 45 | 60 | 2,81 | | 60 | 45 | 3,15 | 1,74 |
| | 140 | 55 | 55 | 70 | 3,44 | | 70 | 55 | 3,37 | 1,97 |
| | 160 | 65 | 60 | 75 | 4,06 | | 80 | 65 | 3,59 | 2,06 |
| | 180 | 75 | 70 | 85 | 4,69 | | 90 | 75 | 3,81 | 2,12 |
| | 200 | 85 | 75 | 90 | 5,31 | | 100 | 85 | 4,03 | 2,19 |
| | 220 | 95 | 85 | 100 | 5,94 | | 110 | 95 | 4,25 | 2,26 |
| | 240 | 105 | 90 | 105 | 6,56 | | 120 | 105 | 4,30 | 2,32 |
| | 260 | 115 | 95 | 110 | 7,19 | | 130 | 115 | 4,30 | 2,39 |
| | 280 | 125 | 105 | 120 | 7,81 | | 140 | 125 | 4,30 | 2,46 |
| | 300 | 135 | 110 | 125 | 8,44 | | 150 | 135 | 4,30 | 2,52 |
| | 340 | 155 | 125 | 140 | 9,69 | | 170 | 155 | 4,30 | 2,65 |
| | 380 | 175 | 140 | 155 | 10,94 | | 190 | 175 | 4,30 | 2,79 |
| 9 | 160 | 65 | 60 | 75 | 5,22 | 17,96 | 80 | 65 | 5,10 | 2,81 |
| | 180 | 75 | 70 | 85 | 6,03 | | 90 | 75 | 5,38 | 3,08 |
| | 200 | 85 | 75 | 90 | 6,83 | | 100 | 85 | 5,67 | 3,18 |
| | 220 | 95 | 85 | 100 | 7,63 | | 110 | 95 | 5,95 | 3,27 |
| | 240 | 105 | 90 | 105 | 8,44 | | 120 | 105 | 6,23 | 3,35 |
| | 260 | 115 | 95 | 110 | 9,24 | | 130 | 115 | 6,50 | 3,44 |
| | 280 | 125 | 105 | 120 | 10,04 | | 140 | 125 | 6,50 | 3,52 |
| | 300 | 135 | 110 | 125 | 10,85 | | 150 | 135 | 6,50 | 3,61 |
| | 320 | 145 | 120 | 135 | 11,65 | | 160 | 145 | 6,50 | 3,69 |
| | 340 | 155 | 125 | 140 | 12,46 | | 170 | 155 | 6,50 | 3,78 |
| | 360 | 165 | 130 | 145 | 13,26 | | 180 | 165 | 6,50 | 3,86 |
| | 380 | 175 | 140 | 155 | 14,06 | | 190 | 175 | 6,50 | 3,95 |
| | 400 | 185 | 145 | 160 | 14,87 | | 200 | 185 | 6,50 | 4,03 |
| | 440 | 205 | 160 | 175 | 16,47 | | 220 | 205 | 6,50 | 4,21 |
| 480 | 225 | 175 | 190 | 18,08 | 240 | 225 | 6,50 | 4,38 | | |
| 520 | 245 | 190 | 205 | 19,69 | 260 | 245 | 6,50 | 4,55 | | |
| 11 | 250 | 110 | 95 | 110 | 10,80 | 26,87 | 125 | 110 | 8,35 | 4,57 |
| | 300 | 135 | 110 | 125 | 13,26 | | 150 | 135 | 9,06 | 4,83 |
| | 350 | 160 | 130 | 145 | 15,71 | | 175 | 160 | 9,06 | 5,09 |
| | 400 | 185 | 145 | 160 | 18,17 | | 200 | 185 | 9,06 | 5,35 |
| | 450 | 210 | 165 | 180 | 20,63 | | 225 | 210 | 9,06 | 5,61 |
| | 500 | 235 | 180 | 195 | 23,08 | | 250 | 235 | 9,06 | 5,87 |
| | 550 | 260 | 200 | 215 | 25,54 | | 275 | 260 | 9,06 | 6,13 |
| | 600 | 285 | 215 | 230 | 27,99 | | 300 | 285 | 9,06 | 6,39 |

ϵ = screw-to-grain angle

NOTES and GENERAL PRINCIPLES on page 151.

**SHEAR CONNECTION
WITH CROSSED CONNECTORS**


VGZ EVO Ø7-9-11 mm

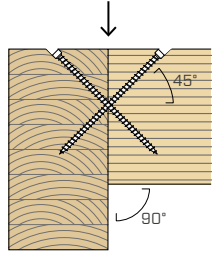

STRUCTURAL VALUES on page 130.

**CONNECTIONS WITH
CLT AND LVL ELEMENTS**

VGZ EVO Ø7-9-11 mm

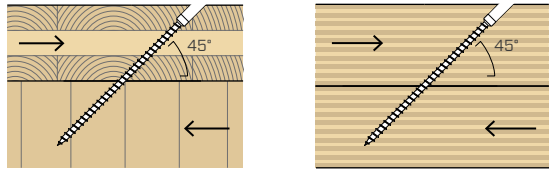

STRUCTURAL VALUES on page 134.

STRUCTURAL VALUES

GENERAL PRINCIPLES

- Characteristic values comply with the EN 1995:2014 standard in accordance with ETA-11/0030.
- The tensile design strength of the connector is the lower between the timber-side design strength ($R_{ax,d}$) and the steel-side design strength ($R_{tens,d}$).

$$R_{ax,d} = \min \left\{ \begin{array}{l} \frac{R_{ax,k} \cdot k_{mod}}{Y_M} \\ \frac{R_{tens,k}}{Y_{M2}} \end{array} \right.$$

- The compression design strength of the connector is the lower between the timber-side design strength ($R_{ax,d}$) and the instability design strength ($R_{ki,d}$).

$$R_{ax,d} = \min \left\{ \begin{array}{l} \frac{R_{ax,k} \cdot k_{mod}}{Y_M} \\ \frac{R_{ki,k}}{Y_{M1}} \end{array} \right.$$

- The design sliding strength of the joint is either the timber-side design strength ($R_{V,d}$) and the design strength on the steel side projected at 45°. ($R_{tens,45,d}$), whichever is lower:

$$R_{V,d} = \min \left\{ \begin{array}{l} \frac{R_{V,k} \cdot k_{mod}}{Y_M} \\ \frac{R_{tens,45,k}}{Y_{M2}} \end{array} \right.$$

- The design shear strength of the connector is obtained from the characteristic value as follows:

$$R_{V,d} = \frac{R_{V,k} \cdot k_{mod}}{Y_M}$$

- The coefficients Y_M and k_{mod} should be taken according to the current regulations used for the calculation.
- For the mechanical resistance values and the geometry of the screws, reference was made to ETA-11/0030.
- Dimensioning and verification of the timber elements must be carried out separately.
- The screws must be positioned in accordance with the minimum distances.
- The characteristic thread withdrawal strengths were evaluated considering a penetration length of $S_{g,tot}$ or S_g , as shown in the table. For intermediate values of S_g it is possible to linearly interpolate. A minimum penetration length of $4 \cdot d_1$ is considered.
- The shear strength and sliding values were evaluated considering the centre of gravity of the connector placed in correspondence with the shear plane.
- The characteristic shear resistances are calculated for screws inserted without pre-drilling hole. In the case of screws inserted with pre-drilling hole, greater resistance values can be obtained.
- For different calculation configurations, the MyProject software is available (www.rothoblaas.com).

NOTES

- The characteristic thread withdrawal resistances were evaluated considering both an ϵ angle of 90° ($R_{ax,90,k}$) and of 0° ($R_{ax,0,k}$) between the grains of the timber element and the connector.
- The characteristic sliding strengths were evaluated by considering an angle ϵ of 45° between the grains of the timber element and the connector.
- The characteristic timber-to-timber shear strengths were evaluated considering both an ϵ angle of 90° ($R_{V,90,k}$) and 0° ($R_{V,0,k}$) between the grains of the second element and the connector.
- For the calculation process a timber characteristic density $\rho_k = 385 \text{ kg/m}^3$ has been considered.

For different ρ_k values, the strength values in the table (withdrawal, compression, sliding and shear) can be converted via the k_{dens} coefficient.

$$R'_{ax,k} = k_{dens,ax} \cdot R_{ax,k}$$

$$R'_{ki,k} = k_{dens,ki} \cdot R_{ki,k}$$

$$R'_{V,k} = k_{dens,ax} \cdot R_{V,k}$$

$$R'_{V,90,k} = k_{dens,V} \cdot R_{V,90,k}$$

$$R'_{V,0,k} = k_{dens,V} \cdot R_{V,0,k}$$

| ρ_k [kg/m ³] | 350 | 380 | 385 | 405 | 425 | 430 | 440 |
|----------------------------------|------|------|------------|-------|-------|-------|-------|
| C-GL | C24 | C30 | GL24h | GL26h | GL28h | GL30h | GL32h |
| $k_{dens,ax}$ | 0,92 | 0,98 | 1,00 | 1,04 | 1,08 | 1,09 | 1,11 |
| $k_{dens,ki}$ | 0,97 | 0,99 | 1,00 | 1,00 | 1,01 | 1,02 | 1,02 |
| $k_{dens,v}$ | 0,90 | 0,98 | 1,00 | 1,02 | 1,05 | 1,05 | 1,07 |

Strength values thus determined may differ, for higher safety standards, from those resulting from an exact calculation.