

SBN - SBN A2 | AISI304

SELF-DRILLING METAL SCREW

TIP FOR METAL


Special self-perforating tip for iron and steel in thicknesses ranging from 0,7 mm to 5,25 mm. Ideal for fastening overlapping sections of metal and sheet metal.

FINE THREAD

Fine thread ideal for precise fastening on sheet metal or for metal-to-metal or timber-to-metal couplings.

STAINLESS STEEL

Also available in a bimetal version with head and body in A2 | AISI304 stainless steel and tip in carbon steel. Ideal for outdoor fastening of clips on aluminium supports.

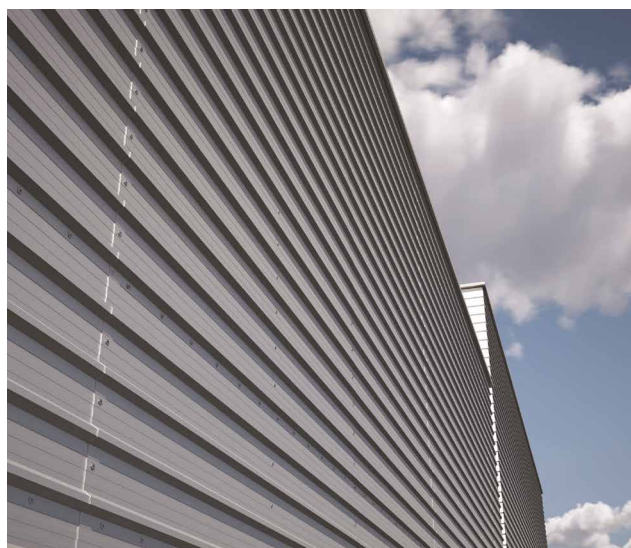

DIAMETER [mm]

3,5 **3,5** 5,5 8

LENGTH [mm]

25 **25** 50 240

SERVICE CLASS

SC1 SC2 SC3

ATMOSPHERIC CORROSIVITY

C1 **C2** C3 C4

WOOD CORROSIVITY

T1 T2 **T3** T4

MATERIAL

Zn
ELECTRO
PLATED electrogalvanized carbon steel

A2
AISI 304 A2 | AISI304 austenitic stainless steel
(CRC II)



FIELDS OF USE

Direct fastening, without pre-drill, of metal structural elements to steel substructures (maximum thickness: 5,25 mm).

CODES AND DIMENSIONS

SBN


d ₁ [mm]	CODE	L [mm]	b [mm]	A [mm]	s [mm]	pcs
3,5 TX 15	SBN3525	25	16	16	0.7 ÷ 2.25	500
3,9 TX 15	SBN3932	35	27	23	0.7 ÷ 2.40	200
4,2 TX 20	SBN4238	38	30	29	1.75 ÷ 3.00	200
4,8 TX 25	SBN4845	45	34	34	1.75 ÷ 4.40	200
5,5 TX 25	SBN5550	50	38	38	1.75 ÷ 5.25	200

SBN A2 | AISI304

d ₁ [mm]	CODE	L [mm]	b [mm]	A [mm]	s [mm]	pcs
3,5 TX 15	SBNA23525	25	18	20	0.7 ÷ 2.25	1000
3,9 TX 15	SBNA23932	32	24	25	0.7 ÷ 2.40	1000


s thickness that can be drilled, metal plate (steel or aluminium)

GEOMETRY

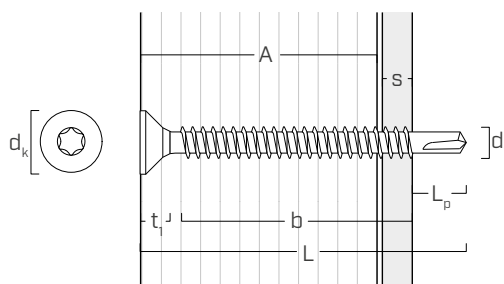

Nominal diameter	d ₁	[mm]	SBN					SBN A2	
			3,5	3,9	4,2	4,8	5,5	3,5	3,9
Head diameter	dk	[mm]	6,50	7,50	7,90	9,30	10,60	7,30	7,50
Head thickness	t ₁	[mm]	2,60	3,80	3,60	3,90	4,10	3,40	3,80
Tip length	L _p	[mm]	5,0	5,2	6,2	6,6	7,5	4,9	5,2

INSTALLATION

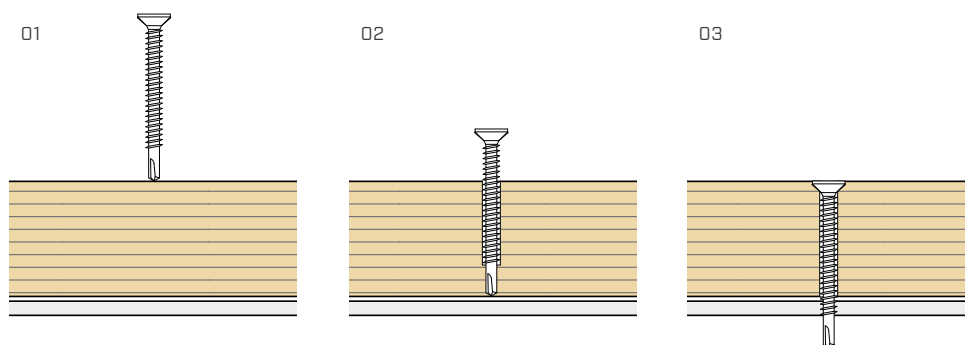

RECOMMENDATIONS FOR SCREWING:

steel: v_S ≈ 1000 - 1500 rpm
aluminium: v_A ≈ 600-1000 rpm



SBN A2 | AISI304

Ideal for outdoor fastening to standard Rotho-blaas aluminium clips.

See CLIP for decks from page 356.