

# VERTIGRIP ON WALL



## VERTICAL LIFELINE ON WALL

### PRACTICAL

The special-purpose supports allow installation on substructures in CLT, concrete or steel.

### ADJUSTABLE

Possibility of adjusting the distance of the lifeline from the wall.

### FUNCTIONAL

It can be installed on walls inclined at an angle of up to 15° from the vertical.

EN 353-1:2014 + A1:2017	RIU 11.119	AS/NZS 1891.3:2020
-------------------------------	------------	-----------------------



MAXIMUM NUMBER  
OF USERS



BIM












VIDEO




MANUALS




## TECHNICAL DATA\*

substructure	minimum thickness	fasteners
 CLT	100 mm	VGS Ø11 
 C20/25	140 mm	AB1 Ø12 AB1A4 
		SKR Ø12 
		rod Ø12 
		VIN-FIX HYB-FIX 
 S235JR	6 mm	EKS + ULS + MUT 

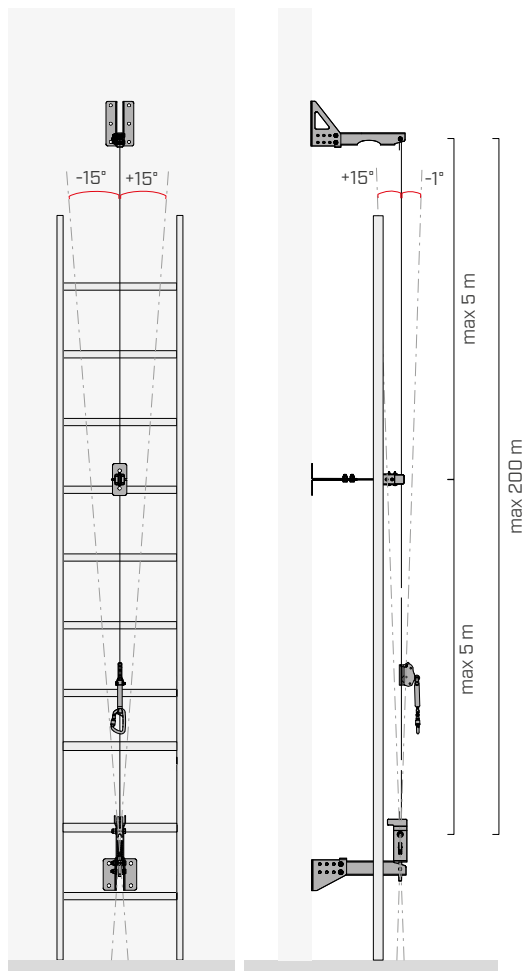

\* The values indicated are derived from experimental tests carried out under the supervision of third party organisations according to the referenced standard. For a calculation report with minimum distances, according to the referenced normative requirements, the substructure must be verified by a qualified engineer before installation.

## VERTICAL LIFELINE COMPONENTS

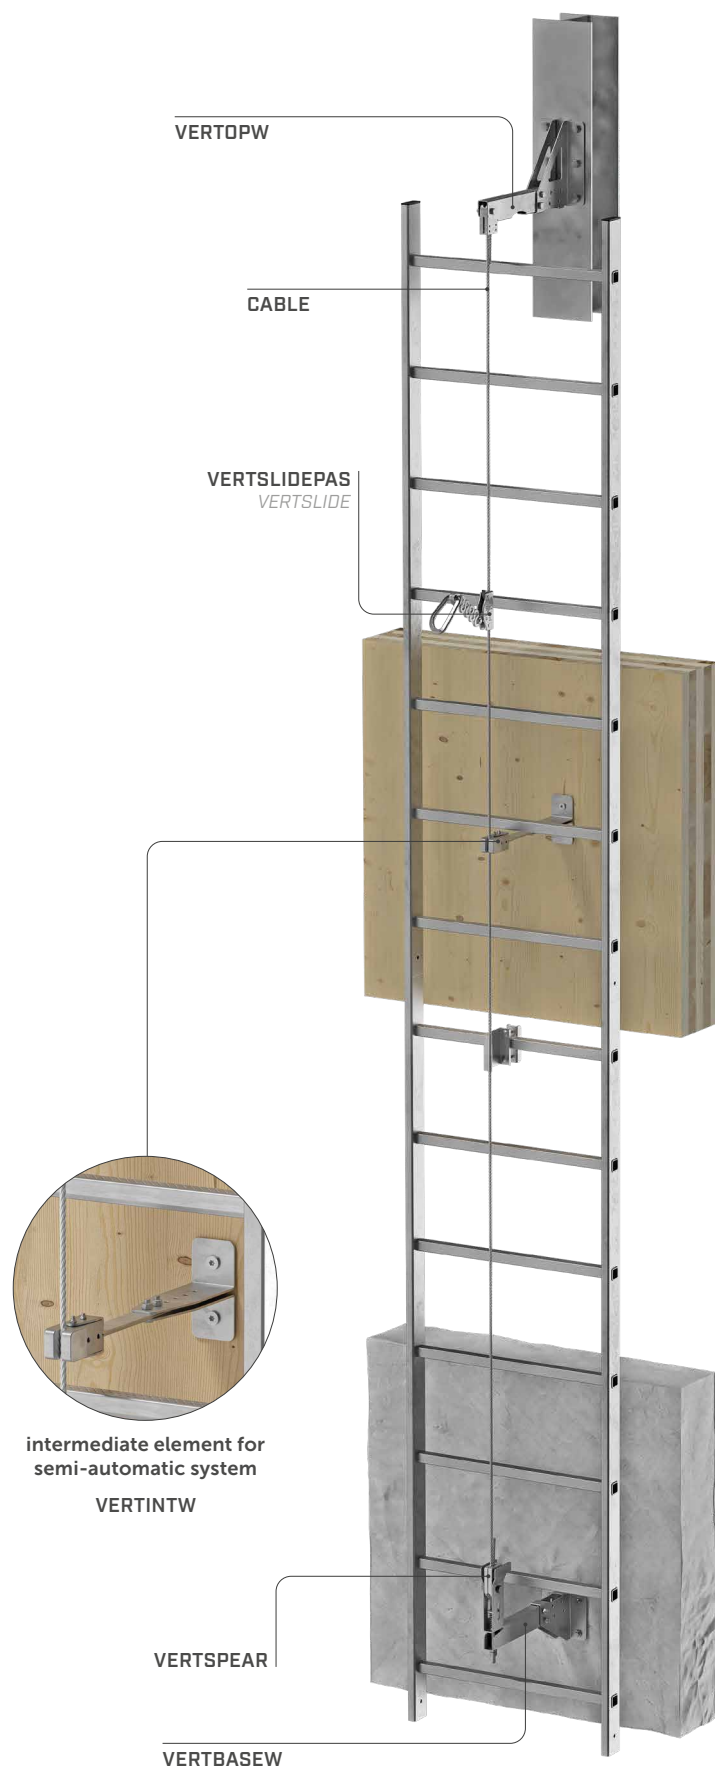

**A4**  
AISI 316

### NOTE:

For versions in A4, see the page on components (see page 90).