

EASY LAD

PITCHED LADDER

DLgs.
81/2008

EN 131

SIMPLE


Pre-assembled ladder made of aluminium alloy, making transport and installation easier thanks to its lightweight design.

ERGONOMIC

The 85 mm deep steps, handrail and 70° incline ensure safe and comfortable access.


VERSATILE

Equipped with handrails, fastening hooks and landing handles, it enables access to mezzanine levels, shelving and machinery. It is available in various heights, ranging from 205 cm to 595 cm.

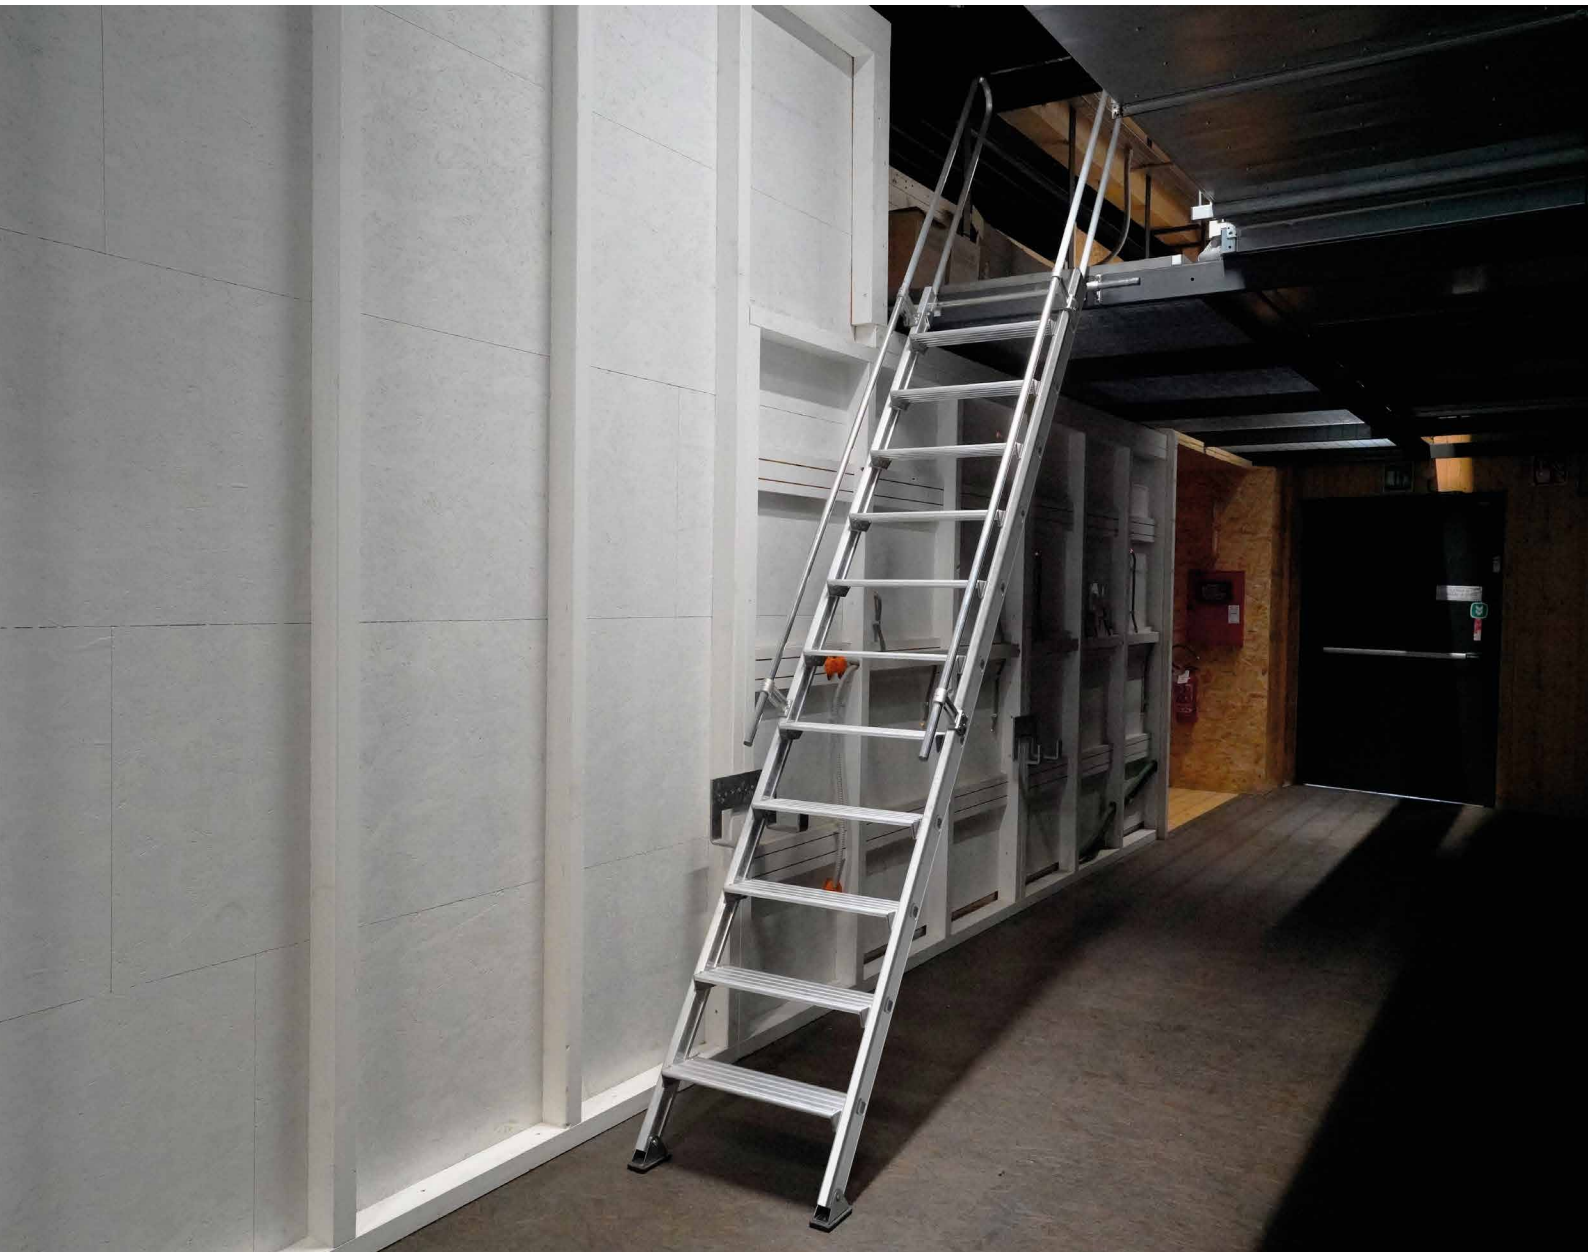

CODES AND DIMENSIONS

CODE	description	B	L	H	no. of steps	pcs
		[mm] [in]	[mm] [in]	[mm] [in]		
ELAD200	straight ladder with 70° incline H= 2,0 m with fixed handrails	210 8 1/4	450 17 3/4	2050 80 5/7	6	1
ELAD250	straight ladder with 70° incline H= 2,5 m with fixed handrails	210 8 1/4	450 17 3/4	2650 104 1/3	8	1
ELAD300	straight ladder with 70° incline H= 3,0 m with fixed handrails	210 8 1/4	450 17 3/4	2950 116 1/7	9	1
ELAD350	straight ladder with 70° incline H= 3,5 m with fixed handrails	210 8 1/4	450 17 3/4	3550 139 3/4	11	1
ELAD400	straight ladder with 70° incline H= 4,0 m with fixed handrails	210 8 1/4	450 17 3/4	4110 161 4/5	13	1
ELAD450	straight ladder with 70° incline H= 4,5 m with fixed handrails	210 8 1/4	450 17 3/4	4450 175 1/5	14	1
ELAD500	straight ladder with 70° incline H= 5,0 m with fixed handrails	210 8 1/4	450 17 3/4	5050 198 4/5	16	1
ELAD550	straight ladder with 70° incline H= 5,5 m with fixed handrails	210 8 1/4	450 17 3/4	5610 220 6/7	18	1
ELAD600	straight ladder with 70° incline H= 6,0 m with fixed handrails	210 8 1/4	450 17 3/4	5950 234 1/4	19	1

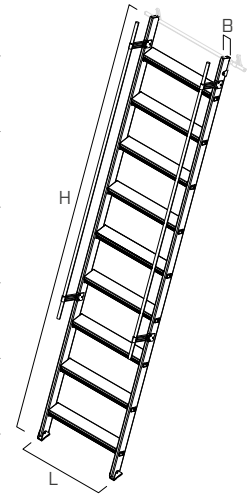

COMPLEMENTARY PRODUCTS

	CODE	description	pcs
HOOKS	ELADHOOKL	long hook for vertical support	1
	ELADHOOKS	standard short hook	1
HANDLES	ELADHANDSC	pair of horizontal handles with interlocks	1
	ELADHANDSV	pair of vertical handles with interlocks	1
SPACERS	ELADDIST	pair of 200 mm spacers	1
SUPPORTS	ELADWHEELS	pair of wheels for side sliding	1
	ELADBAR25	Ø25 rung for attaching the ladder	by the metre
	ELADBRA	bracket to mount the rung on the wall	1