

PINCER TIP


ROOF CLAMP

- The large stop surface makes it easier to insert the tips and guarantees maximum stability
- Thanks to the special movable pressure plate, it can also be used in oblique position
- Tightening torque of up to 12,0 kN | 2700 lbf



CODES AND DIMENSIONS

CODE	opening (a) [mm] [in]	scrapping (c) [mm] [in]	profile (x) [mm] [in]	weight [kg] [lbs]	pcs
PINTIP60	600 23 5/8	120 4 3/4	27 x 13 1 1/16 x 1/2	2,9 6.4	1
PINTIP80	800 31 1/2	140 5 1/2	30 x 15 1 3/16 x 9/16	5,0 11	1

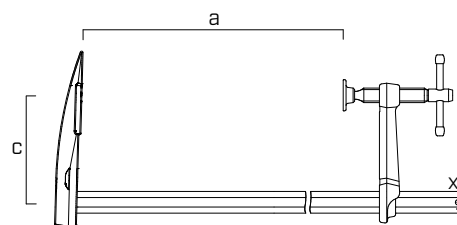

GRIZZLY

UNIVERSAL PANEL HOLDER

- Suitable for transportation of panels made of timber, OSB, MDF, non-lubricated metal, plastic, plasterboard and other materials
- Capacity up to 100 kg | 220 lbs each handle




GRIZZLY55



GRIZZLY80



GRIZZLY110

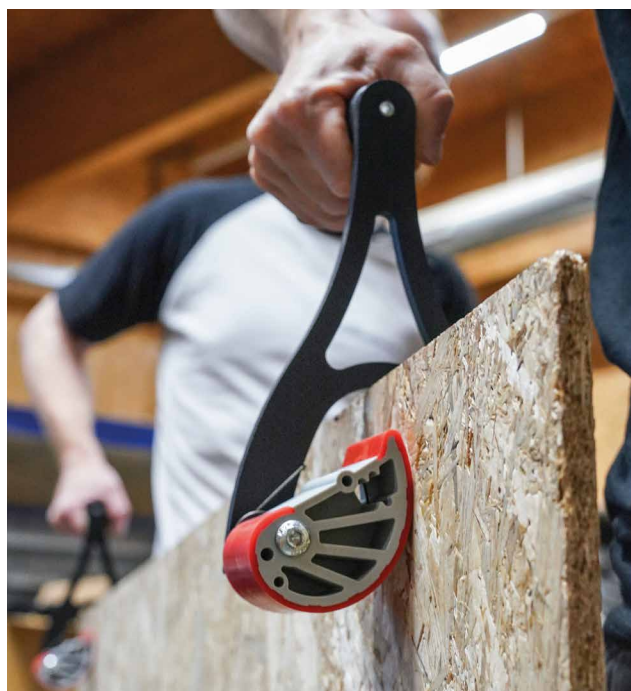

CODES AND DIMENSIONS

CODE	opening		pcs
GRIZZLY55	0 - 55 mm	0 - 2 3/16"	2
GRIZZLY80	30 - 80 mm	1 3/16" - 3 1/8"	2
GRIZZLY110	60 - 110 mm	2 3/8" - 4 3/8"	2

COMPLEMENTARY PRODUCTS - ACCESSORIES

CODE	description	pcs
GRIZZLYSP	1 pair of spare jaws for all GRIZZLY models	2