

KSS 60 | KSS 80

CROSS-CUTTING SYSTEM



MA91B102




MA91D901



MA918501

CODES AND DIMENSIONS

CODE	description	pcs
MA91B102	KSS 60 cc cross-cutting system in carry case	1
MA91D901	KSS 60 18M bl cordless cross-cutting system in carry case	1
MA918501	cross-cutting system KSS 80 Ec/370	1

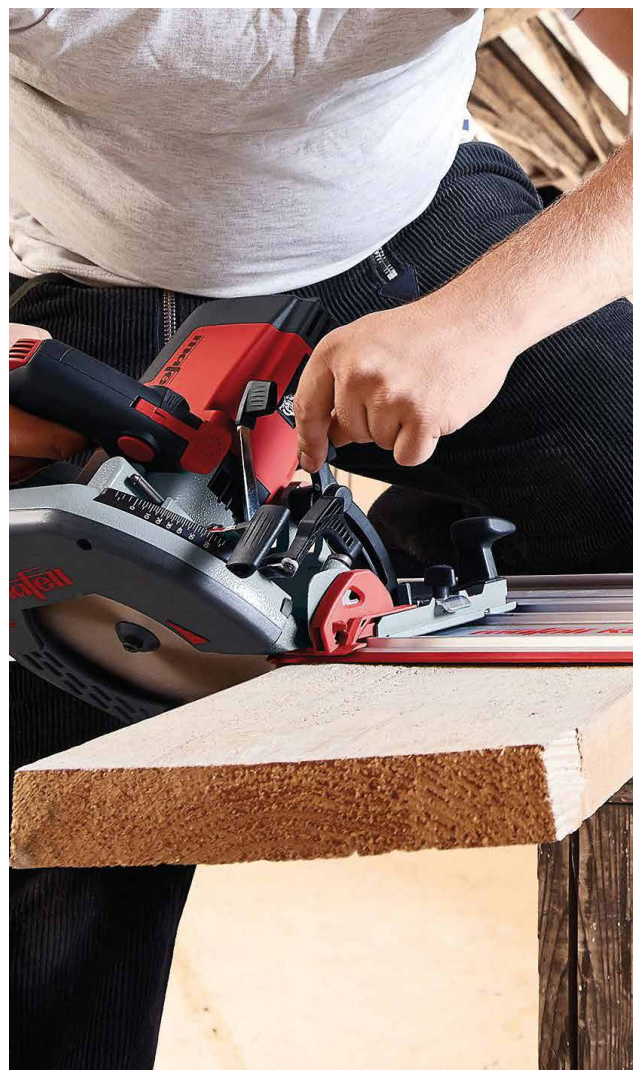

TECHNICAL DATA

Properties	KSS 60 cc	KSS 60 18M	KSS 80 EC
Universal motor	230 V/50 Hz	-	230 V/50 Hz
Power absorbed	1800 W	-	2300 W
Battery	-	18V, 99 Wh, LiHD	-
Cutting depth at 0° with guide track	0 - 61 mm 0 - 2 3/8"	0 - 61 mm 0 - 2 3/8"	0 - 82 mm 0 - 3 1/4"
Cutting depth at 45° with guide track	0 - 47 mm 0 - 1 7/8"	0 - 47 mm 0 - 1 7/8"	0 - 55,5 mm 0 - 2 3/16"
Cutting depth at 0° without guide track	0 - 67 mm 0 - 2 5/8"	0 - 67 mm 0 - 2 5/8"	0 - 88 mm 0 - 3 7/16"
Cutting depth at maximum angle without guide track	0 - 53 mm 0 - 2 1/16"	0 - 53 mm 0 - 2 1/16"	0 - 38,5 mm 0 - 1 1/2"
Slope angle	0 - 45°	0 - 45°	0 - 60°
Cut length	408 mm 16 1/16"	408 mm 16 1/16"	370 mm 14 9/16"
Angle cuts	-60 - +60°	-60 - +60°	-60 - +50°
Number of nominal empty turns	2700 - 4700 1/min	4450 1/min	2250 - 4400 1/min
Weight with guide track	5,9 kg 13.0 lbs	5,8 kg 12.8 lbs	8,3 kg 18.3 lbs